

DIVINE®
COMPLETE CARPET SOLUTION



TOTAL : 563 X 285

SINGLE SIDE: 281.68 WIDTH X 285 HEIGHT





COLLINS

SPECIFICATIONS


Construction	VLOC
Fiber Composition	100% Polyester
Dye Method	Solution Dyed
Pile Weight	750 g/m ²
Tuft Density	203390/m ²
Tufting Gauge	1/12”
Primary Backing	Woven
Secondary Backing	Action Fleece - Backing
Pile Height	5.0 mm ±0.5 mm
Total Height	7.0 mm ±0.5 mm
Pattern Repeat	52.0 cms x 49.0 cms
Carpet Width	4.0 mtr



PERFORMANCE SPECIFICATION

WEAR CLASSIFICATION	HEAVY CONTRACT	
VOC EMISSION	ASTM D5116-06	< 0.5 mg/m ² /hour (CRI GLP)
FLAMMABILITY	ASTM D-2859//FF 1-70//16CFR 1630	Pass 8/8
CRITICAL RADIANT FLUX	ASTM E648-08	Class I
STATIC PROPENSITY	ISO 6356	< 0.2 kV
COLOR FASTNESS	AATCC/16	5/5 on Grey Scale
THERMAL RESISTANCE	ISO 8302	.041 m ² K/W
IMPACT SOUND INSULATION	ISO 140-8	ΔLw = 24dB
SOUND ABSORPTION LEVEL	EN ISO 11654	αw: 0.15(H)
SOILING PROPENSITY	ASTM D 6540-00	4
DIMENSIONAL STABILITY	EN 986	< 0.20%
SMOKE DENSITY	EN ISO 9239-1:2002	< 450

The above Information is subject to modification for the benefit of further improvement. Manufacturing tolerance: ±5%

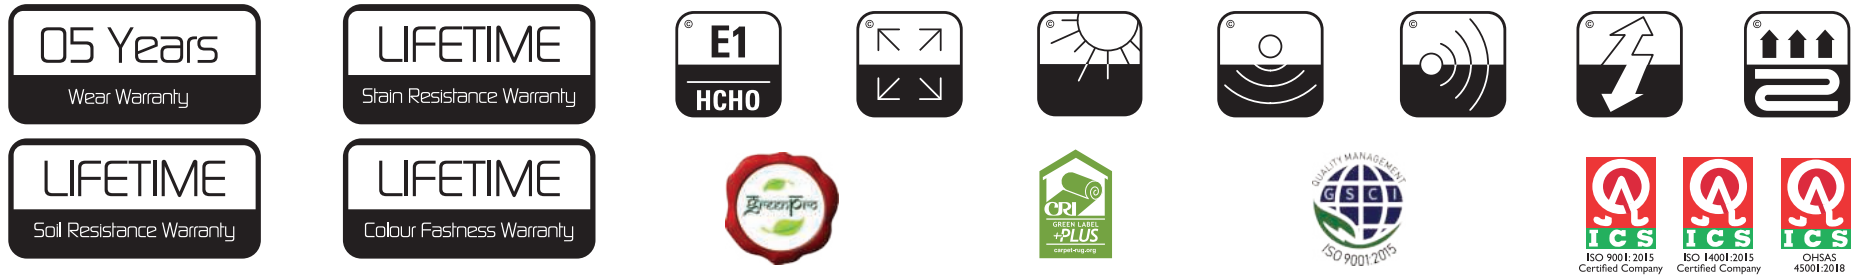

DIVINE[®]
COMPLETE CARPET SOLUTION

Presented to you by the legacy of
F&F | FLOOR & FURNISHIGS